

T-Shark®


Battery strapping tool for polyester and polypropylene straps with vibration sealing



Features

- ✓ high and consistent joint strength values
- ✓ light and balanced, reducing fatigue
- ✓ auto power off feature
- ✓ lockable display for enhanced load security
- ✓ visual and acoustic “cycle finished” indication eliminating early releases
- ✓ high and consistent strap tension

Watch on YouTube:

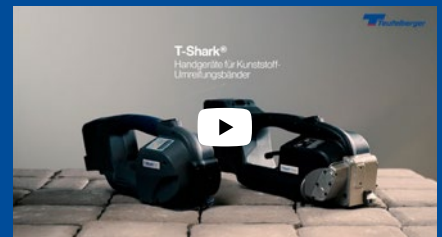

Models



T-Shark®		GP	HT	HD	XTend	
Operation mode	manual	✓	✓	✓	✓	
	semi-automatic	-	✓	✓	✓	
	automatic	-	✓	✓	✓	
Tension force	standard	N	650 - 1,800	1,200 - 2,800	1,200 - 4,200	2,500 - 6,500
		lbs	146 - 404	240 - 630	240 - 945	560 - 1,465
	soft	N	240 - 1,000	500 - 1,500	500 - 1,500	1,800 - 5,000
		lbs	54 - 225	112 - 337	112 - 337	450 - 1,125
Tension speed	m/min	14	12	9	5	
	inch/sec	9	8	6	3	
Strap	Type	PP - PET			PET	
Strap width	mm	9-16	10-16	16-19	25-32	
	inch	$\frac{3}{8}$ - $\frac{5}{8}$	$\frac{7}{16}$ - $\frac{5}{8}$	$\frac{5}{8}$ - $\frac{3}{4}$	1 - 1 $\frac{1}{4}$	
Strap thickness	mm	0.5 - 1.05	0.5 - 1.1	0.8 - 1.27	0.9 - 1.3	
	inch	0.019 - 0.041	0.02 - 0.043	0.031 - 0.05	0.035 - 0.051	
Battery	Power Li-Ion	14 V, 3.0 Ah	14.4 V, 4.0 Ah	18 V, 5.0 Ah	36 V, 5.0 Ah	
Dimensions	Length	mm	330			425
		inch	13			16.5
	Width	mm	105			135
		inch	4.13			5.5
	Height	mm	165			180
		inch	6.49			7
Weight	kg	3.6	3.75	4.0	6.2	
	lbs	7.9	8.26	8.8	13.7	
Sealing	vibration sealing	PP - PET			PET	
Polypropylene Strap (PP)					-	
Polyester Strap (PET)						
		✓ additional battery				
		✓ additional charger				
Accessories						